



DSP Research Inc.

Wireless LAN Technical Requirement

A decorative graphic consisting of a vertical black line on the left side, intersected by a horizontal black line. To the left of the vertical line are three overlapping squares: a blue one on top, a red one on the left, and a yellow one on the bottom. A large, faint, circular watermark with the text 'dsp' is visible in the background.

IEEE 802.11b/g/a, Bluetooth
Technical Standard
under the Japanese Radio Law



Low Power Data Comm. Sys.

- 2.4GHz Wide-band: *802.11b/g (1-13ch), Bluetooth*
 - 2400 – 2483.5 MHz
- 2.4GHz: *802.11b (14ch)*
 - 2471 – 2497 MHz
- 5GHz: *802.11a (W52, W53)*
 - 5180, 5200, 5220, 5240 , 5260, 5280, 5300, 5320MHz




ARIB Standard

Regulation	IEEE	ARIB Std.	
2.4 GHz Wide-Band Data Comm.	802.11b/g	ARIB STD-T66	Include Bluetooth
2.4 GHz Band Data Comm.	802.11b	RCR STD-33	14ch only
5 GHz Band Data Comm.	802.11a	ARIB STD-T71	CSMA W52, W53

ARIB: Association of Radio Industries and Businesses

HiSWAN: High Speed Wireless Access Network

RF Output Power & E.I.R.P

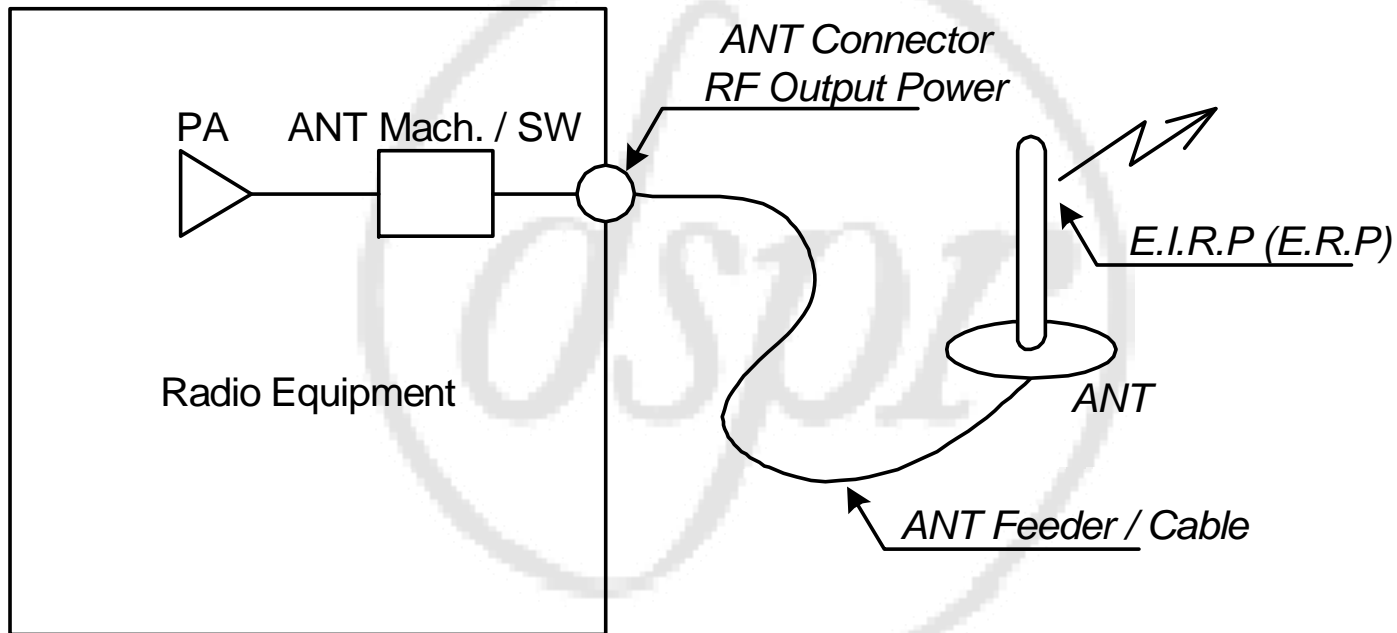

E.I.R.P: Effective (Equivalent) Isotropic Radiated Power

E.R.P: Effective Radiated Power


Directional Antenna

- 2.4 GHz Wide-band Data Comm. Sys.

- E.I.R.P allowed over 12.14 dBm/MHz

$$HPBA < 360/A$$

$$A = E.I.R.P(dBm/MHz) - 12.14(dBm/MHz)$$

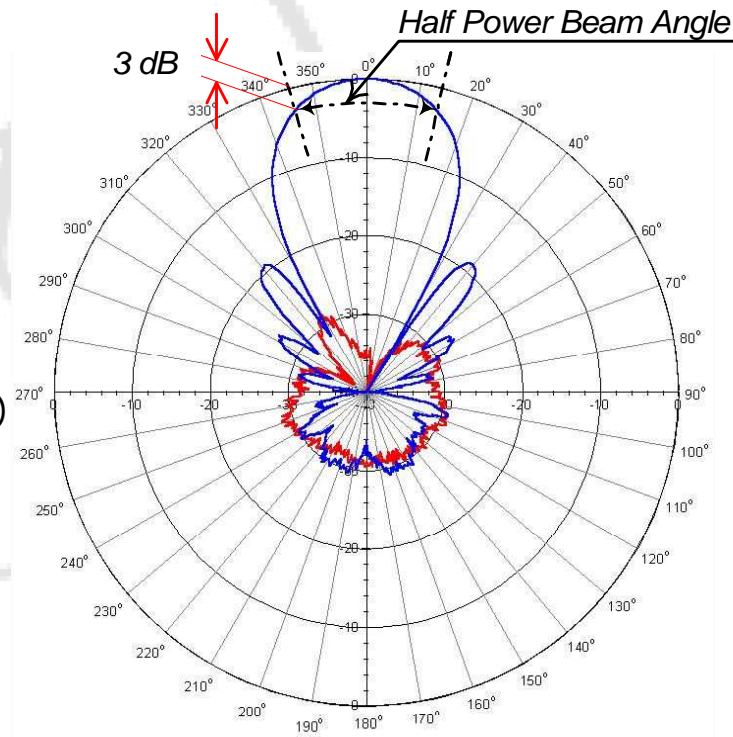

2.4 GHz Wide-band Data Comm. Sys.


- 802.11b/g (allowed Digital Data Transmission only)

e.g. DSSS Wireless LAN (802.11b), OFDM Wireless LAN (**802.11g**), FHSS Bluetooth etc..

Allocated 2400 to 2483.5 MHz

Frequency Tolerance:	≤ 50 ppm	
Occupied Band Width:	≤ 26 MHz for DSSS or,	≤ 83.5 MHz for FHSS (Bluetooth)
Spread Band Width:	≥ 500 kHz &	5 Spreading Factor
Output Power:	≤ 10 mW/MHz	
ERP:	≤ 12.14 dBm/MHz or,	≤ 22.14 dBm/MHz
Output Power Tolerance:	+20%, -80%	
Spurious Emission:	≤ 2.5 μ W	2387 MHz > f, 2496.5 MHz < f
	≤ 25 μ W	2387 \leq f < 2400 MHz
		2483.5 < f \leq 2496.5 MHz
Emitted RF wave Strength:	≤ 4 nW	f < 1GHz
	≤ 20 nW	1 GHz \leq f
Dwell Time	≤ 0.4 sec.	for FHSS (Bluetooth) only
Carrier Sense & Identification code		

2.4 GHz Wide-band Data Comm. Sys.

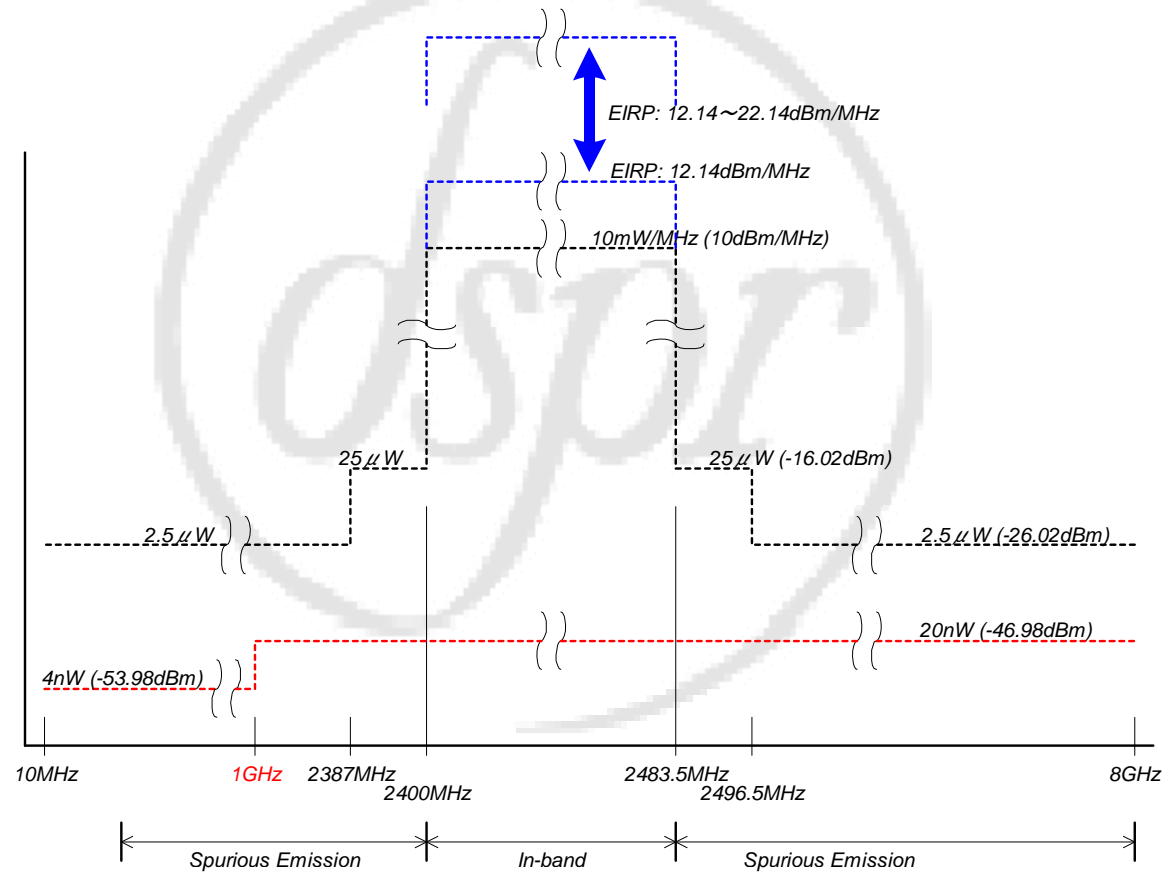

2.4 GHz Band Data Comm. Sys.


- 802.11b (allowed Digital Data Transmission only)

e.g. DSSS Wireless LAN (802.11b), FHSS etc..

Allocated 2471 to 2497 MHz

Frequency Tolerance:	≤ 50 ppm	
Occupied Band Width:	≤ 26 MHz	
Spread Band Width:	≥ 500 kHz &	10 Spreading Factor
Output Power:	≤ 10 mW/MHz	
ERP:	≤ 12.14 dBm/MHz	
Output Power Tolerance:	+20%, -80%	
Spurious Emission:	≤ 2.5 μ W	2458 MHz > f, 2510 MHz < f
	≤ 25 μ W	2458 \leq f < 2471 MHz
		2497 < f \leq 2510 MHz
Emitted RF wave Strength:	≤ 4 nW	F < 1 GHz
	≤ 20 nW	1 GHz \leq f
Dwell Time	≤ 0.4 sec.	for FHSS only
Carrier Sense & Identification code		

2.4 GHz Band Data Comm. Sys.

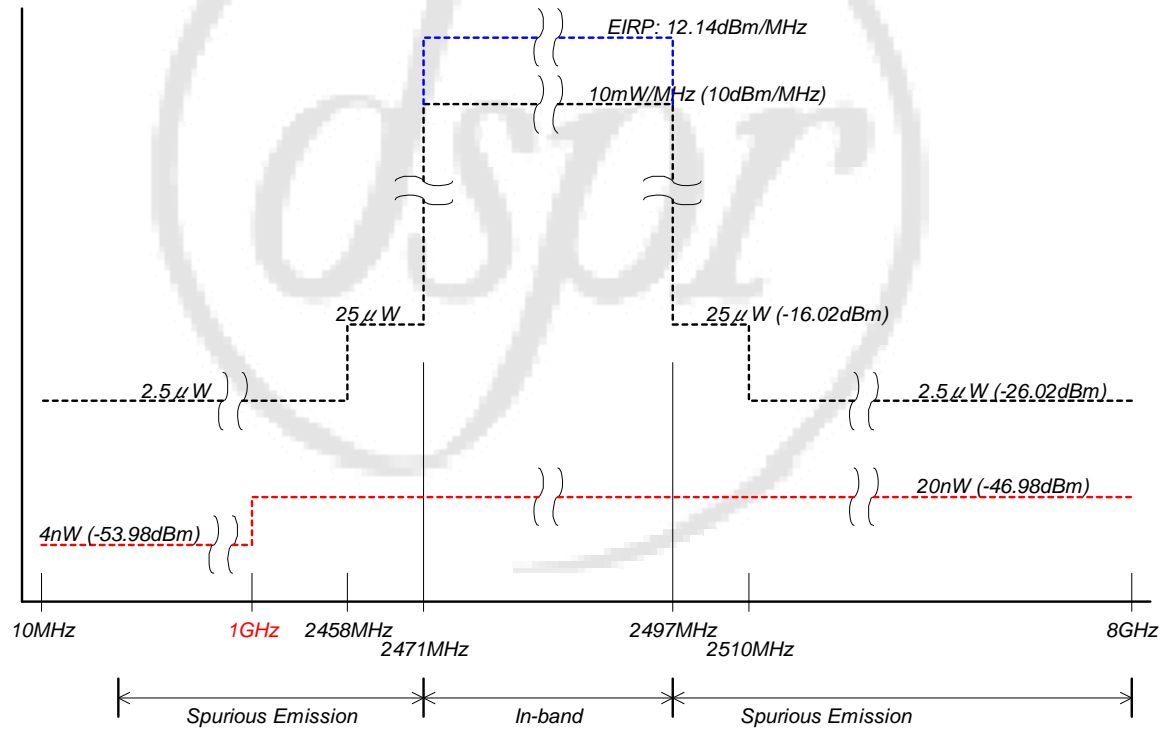

New 5 GHz Band Data Comm. Sys. (W52)

- 802.11a (allowed Digital Data Transmission only)

e.g. OFDM Wireless LAN (802.11a), DSSS etc..


Allocated 5180, 5200, 5220, 5240 MHz

Frequency Tolerance:	≤ 20 ppm	
Occupied Band Width:	≤ 18 MHz	
Spread Band Width:	5 Spreading Factor	
Output Power:	≤ 10 mW/MHz	
EIRP:	≤ 10 mW/MHz	
Output Power Tolerance:	+20%, -80%	
Spurious Emission:	≤ 2.5 μ W/MHz	5140 MHz > fo, 5360 MHz < fo
Adjacent Channel Emitted Power	≥ 25 dB	fo \pm 20 MHz (18 MHz)
	≥ 40 dB	fo \pm 40 MHz (18 MHz)

New 5 GHz Band Data Comm. Sys. (W52)

Out-Band Leakage Power	$\leq 2.5 \mu\text{W}/\text{MHz}$	$5140 \leq f_o \leq 5142 \text{ MHz}$
(EIRP)	$\leq 15.0 \mu\text{W}/\text{MHz}$	$5142 < f_o \leq 5150 \text{ MHz}$
	$\leq 10^{1-(f-9)} \text{ mW}/\text{MHz}$	$5250 \leq f_o < 5251 \text{ MHz}, 10 \leq f < 11 \text{ MHz}$
	$\leq 10^{-1-(8/90)(f-11)} \text{ mW}/\text{MHz}$	$5251 \leq f_o < 5260 \text{ MHz}, 11 \leq f < 20 \text{ MHz}$
	$\leq 10^{-1.8-(6/50)(f-20)} \text{ mW}/\text{MHz}$	$5260 \leq f_o < 5266.7 \text{ MHz}, 20 \leq f < 26.7 \text{ MHz}$
	$\leq 2.5 \mu\text{W}/\text{MHz}$	$5266.7 \leq f_o \leq 5360 \text{ MHz}$
Emitted RF wave Strength:	$\leq 4 \text{ nW}$	$f_o < 1 \text{ GHz}$
	$\leq 20 \text{ nW}$	$1 \text{ GHz} \leq f_o$
Transmission Burst Length:	$\leq 4 \text{ msec.}$	
In-Door Use ONLY		
Carrier Sense & Identification code		

New 5 GHz Band Data Comm. Sys. (W52)

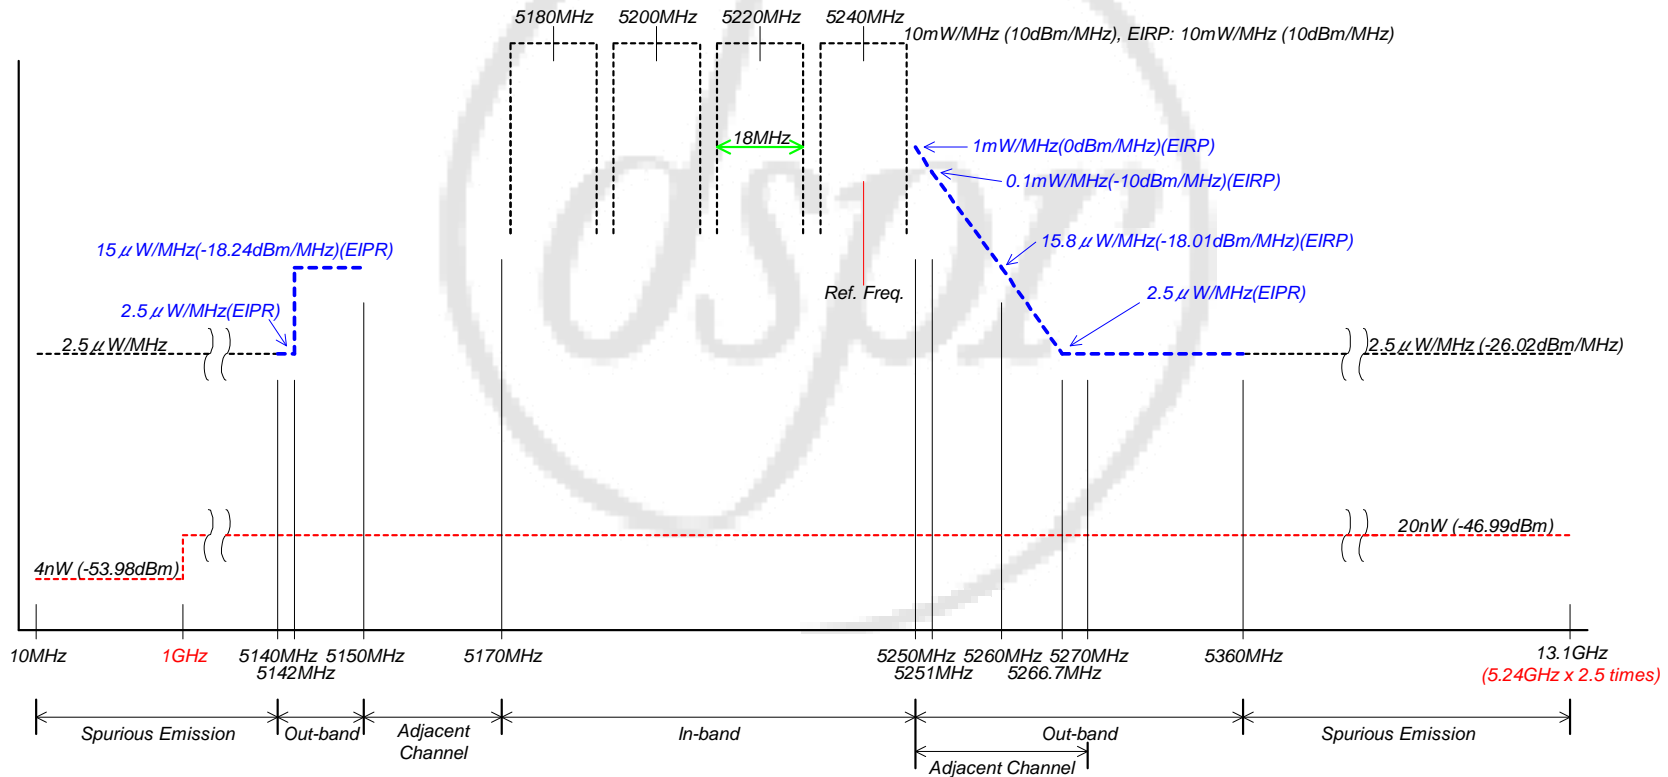

New 5 GHz Band Data Comm. Sys. (W53)

- 802.11a (allowed Digital Data Transmission only)

e.g. OFDM Wireless LAN (802.11a), DSSS etc..


Allocated 5260, 5280, 5300, 5320 MHz

Frequency Tolerance:	≤ 20 ppm	
Occupied Band Width:	≤ 18 MHz	
Spread Band Width:	5 Spreading Factor	
Output Power:	≤ 10 mW/MHz	
EIRP:	≤ 10 mW/MHz	TPC function
	≤ 5 mW/MHz	No TPC function
Output Power Tolerance:	+20%, -80%	
Spurious Emission:	≤ 2.5 μ W/MHz	5140 MHz > fo, 5360 MHz < fo
Adjacent Channel Emitted Power	≥ 25 dB	fo \pm 20 MHz (18 MHz)
	≥ 40 dB	fo \pm 40 MHz (18 MHz)

New 5 GHz Band Data Comm. Sys. (W53)

Out-Band Leakage Power <i>(EIRP)</i>	$\leq 2.5 \mu\text{W}/\text{MHz}$	$5140 \leq f_o \leq 5233.3 \text{ MHz}$
	$\leq 10^{-1.8-(6/50)(f-20)} \text{ mW}/\text{MHz}$	$5233.3 \leq f_o < 5240\text{MHz}, 20 \leq f < 26.7\text{MHz}$
	$\leq 10^{-1-(8/90)(f-11)} \text{ mW}/\text{MHz}$	$5240 \leq f_o < 5249\text{MHz}, 11 \leq f < 20\text{MHz}$
	$\leq 10^{1-(f-9)} \text{ mW}/\text{MHz}$	$5249 \leq f_o < 5250\text{MHz}, 10 \leq f < 11\text{MHz}$
	$\leq 2.5 \mu\text{W}/\text{MHz}$	$5350 \leq f_o \leq 5360\text{MHz}$
Emitted RF wave Strength:	$\leq 4 \text{ nW}$	$f_o < 1 \text{ GHz}$
	$\leq 20 \text{ nW}$	$1 \text{ GHz} \leq f_o$
Transmission Burst Length:	$\leq 4 \text{ msec.}$	
<i>In-Door Use ONLY</i>		
DFS Function, Carrier Sensing Function & Identification code		

New 5 GHz Band Data Comm. Sys. (W53)

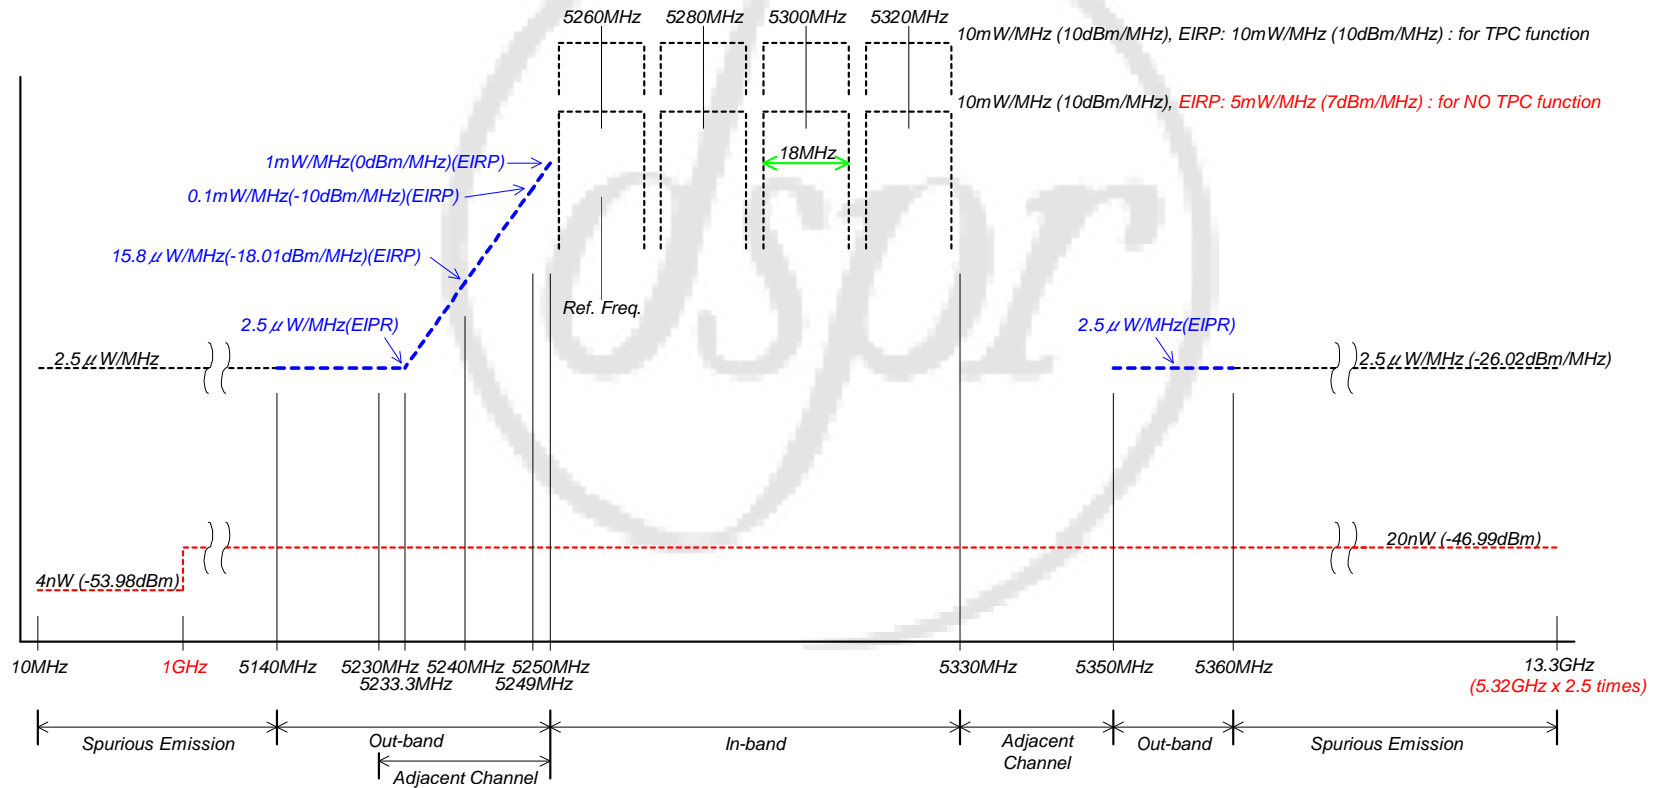



NOTICE - about copyright license

All contents on this documents are the copyrighted material of DSP Research, Inc.

About all contents on this document, unauthorized third party may not use for distribution, second use, disclose, and publication without written copyright license by DSP Research, Inc.

本資料に記載されている全てのコンテンツの著作権は株式会社ディーエスピーリサーチに帰属します。

本資料の全てのコンテンツに対し、これを弊社に著作権使用許諾請求することなく、二次使用すること、ならびに第三者へ配布、公開及び出版することを固く禁じます。